

The DIL switches on the back of the Voxnet 218 operating unit are used to configure basic settings.

**Revox Voxnet 218 operating unit**  
 2228 .., 2238 ..

Music control

**GIRA**

Gira  
 Giersiepen GmbH & Co. KG  
 Electrical installation  
 systems

Industriegebiet Mermbach  
 Dahlienstraße  
 42477 Radevormwald

P.O. Box 12 20  
 42461 Radevormwald

Germany

Phone +49 (0)21 95 - 602-0  
 Fax +49 (0)21 95 - 602-191

www.gira.de  
 info@gira.de

10863855 / 19.02.2016

**Safety notes**



Electrical devices may only be connected and installed by qualified electricians.

Failure to observe the instructions can result in damage to the device, fire, or other dangers.

These instructions are part of the product and must remain with the end customer.

**Device design (Figure 1)**

- 1 Support ring
- 2 Frame
- 3 Revox Voxnet 218 operating unit

**Function**

**Proper use**

- Control of Revox Multiroom/Multiuser system Voxnet.
- For indoor installation in device box as per DIN 49073.

**Product features**

- Individual programming of buttons using the Voxnet system.
- Infrared receiver for Revox remote control.

**Mounting and electrical connection**



The operating unit is only intended for connection to the Revox system Voxnet.

Connection is made using a screwable plug connector (3-pole, see Figure 2). Concerning connection cables, Revox recommends using a two-lead, shielded cable (microphone connection), where the shielding acts as the earth.

- 1 Screw the support ring (1) to the flush- or surface-mounted box.
- 2 Connect the connection cable to the screwable plug connector.
- 3 Set the DIL switches on the back of the operating unit (see Table 1).
- 4 Insert the plug connector.
- 5 Insert the operating unit (3) together with the frame (2).

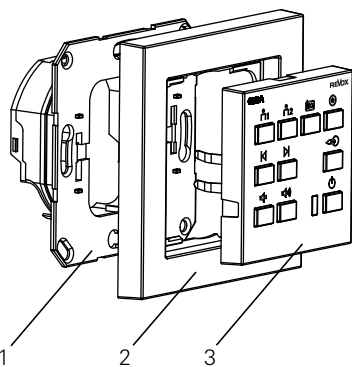


Figure 1

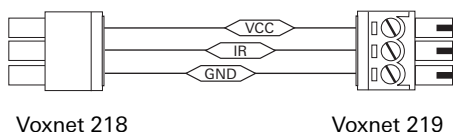


Figure 2

**Table 1: DIL switches**

DIL	Function	Description	Factory setting
1	IR eye On/Off	Internal infrared receiver	On
2	LED	Switch LED on/off	On
3	RC5 Code	RC5 address combinations	Off [0]
4	Pages	00: Code Page 1 10: Code Page 2 01: Code Page 3 11: Code Page 4	Off [0]

**Commissioning**

To commission the operating unit, it must be connected to the Multiroom amplifier Voxnet 219. Information and support related to commissioning and operation can be found in the Revox instructions. For further questions, please contact your Revox specialist trader or Revox GmbH, 78048 VS-Villingen (www.revov.de, support@revov.de, Phone: +49(0)7721-8704-0).

**Technical data**

- Current consumption: 17 mA
- Connection: Screwable plug connector  
3 x 0.15 to 1 mm<sup>2</sup>
- Cable length: max. 100 m to the Revox Multiroom amplifier Voxnet 219  
Cable ≥ 0.5 mm<sup>2</sup>
- Parallel operation: max. 2 operating units can be switched in parallel
- Temperature range: -5 °C to +45 °C
- Protection type: IP 20

**Warranty**

The warranty is provided in accordance with statutory requirements via the specialist trade.

Please submit or send faulty devices postage paid together with an error description to your responsible salesperson (specialist trade/installation company/specialist electrical trade). They will forward the devices to the Gira Service Center.